



- 
- 
- 

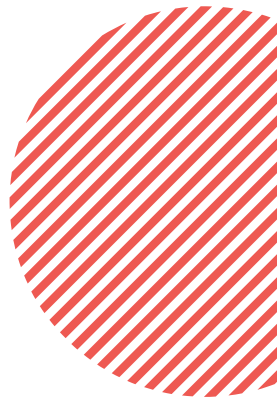

<b>ARES ONE Portable Partial Discharge Detecting System</b>	
<b>SOFTWARE INCLUDED</b>	YES
<b>DYNAMIC RANGE</b>	60 dB
<b>SAMPLING FREQUENCY</b>	30 MHz
<b>DATA STORAGE</b>	Over 300 recordings
<b>ACCURACY</b>	± 1 dB
<b>RESOLUTION</b>	1 dB
<b>BANDWIDTH</b>	300 kHz to 70MHz
<b>OPERATING PHASE SIGNAL RANGE (50-60 Hz)</b>	50 to 700mVrms
<b>OPERATING RF SIGNAL INPUT RANGE</b>	380 uV to 380mV
<b>SENSIVITY</b>	5 pC, depending on DUT capacitance
<b>REFERENCE SIGNAL OUTPUT (REF)</b>	3.4 V
<b>CLOCK</b>	Real-time internal clock
<b>OPERATING TEMPERATURE</b>	-20 to 50°C (-4 to 122°F)
<b>STORAGE TEMPERATURE</b>	-20 to 50°C (-4 to 122°F)
<b>CHARGING TEMPERATURE</b>	0 to 50°C (32 to 122°F)
<b>HUMIDITY</b>	0 a 95% non-condensing
<b>LIQUID PROTECTION</b>	Splash proof
<b>DISPLAY</b>	Backlit LCD screen
<b>AUTONOMY</b>	7.5 horas
<b>BATTERIES</b>	NiMH rechargeable
<b>CHARGING</b>	3 hours
<b>DIMENSIONS</b>	203 x 114 x 51 mm
<b>WEIGHT</b>	860g

<b>XPDP-II-LT Portable Partial Discharge Diagnostic System</b>	
<b>SOFTWARE INCLUDED</b>	NO (Offline model)
<b>DYNAMIC RANGE</b>	60dB
<b>SAMPLING FREQUENCY</b>	30MHz
<b>BANDWIDTH</b>	300kHz to 70 MHz
<b>OPERATING PHASE SIGNAL RANGE (50-60Hz)</b>	50 to 700mVrms
<b>OPERATING RF SIGNAL INPUT RANGE</b>	300uV to 380mV
<b>SENSITIVITY</b>	5pC, depending on DUT capacitance
<b>REFERENCE SIGNAL OUTPUT (REF)</b>	3.4V
<b>CLOCK</b>	Real-time internal clock
<b>OPERATING TEMPERATURE</b>	-20 to 50°C (-4 to 122°F)
<b>STORAGE TEMPERATURE</b>	-20 to 50°C (-4 to 122°F)
<b>HUMIDITY</b>	0 to 95% non-condensing
<b>LIQUID PROTETION</b>	Splashproof
<b>DISPLAY</b>	LCD
<b>AUTONOMY</b>	7.5 hours
<b>BATTERIES</b>	NiMH, rechargeable
<b>CHARGING</b>	3 hours
<b>DIMENSIONS</b>	203 x 114 x 51 mm
<b>WEIGHT</b>	860g

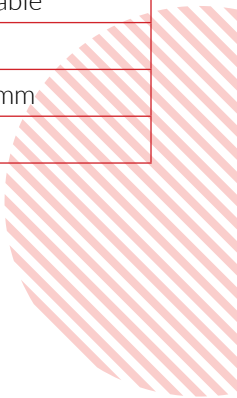

<b>PXDP-II-406 CONTACT ACOUSTIC PROBE</b>	
<b>OPERATING TEMPERATURE</b>	-20 to 50°C
<b>STORAGE TEMPERATURE</b>	-20 to 50°C
<b>DIMENSIONS</b>	113 x 35 x 25 mm
<b>INSTALLATION</b>	Magnetically supported

<b>ULD-401 AIRBORNE PARABOLIC SENSOR</b>	
<b>OPERATING DISTANCE</b>	Optimizado a 15 m (49 pies)
<b>OPERATING TEMPERATURE</b>	-10 to 60°C
<b>STORAGE TEMPERATURE</b>	-20 to 50°C
<b>DISH DIAMETER</b>	250 mm

<b>PXDP-II-016 TEV SENSOR</b>	
<b>OPERATING TEMPERATURE</b>	-20 to 50°C
<b>STORAGE TEMPERATURE</b>	-40 to 85°C
<b>DIMENSIONS</b>	123 x 35 x 69 mm
<b>INSTALLATION</b>	Magnetically supported

<b>XDP-II-017™ WIRELESS PHASE SYNCH</b>	
<b>OPERATING TEMPERATURE</b>	-20 to 65°C
<b>STORAGE TEMPERATURE</b>	-40 to 125°C
<b>DIMENSIONS</b>	120 x 36 x 75 mm
<b>POWER SUPPLY</b>	120-240V 50-60Hz
<b>WIRELESS FREQUENCY</b>	869MHz or 916MHz

<b>PXDP-II-018 HF CONVERTER</b>	
<b>OPERATING TEMPERATURE</b>	0 to 65°C
<b>STORAGE TEMPERATURE</b>	-20 to 60°C
<b>CHARGING TEMPERATURE</b>	0 to 45°C
<b>EXTENDED STORAGE TEMPERATURE (&gt; 2 MONTHS)</b>	<35°C
<b>CHARGING TEMPERATURE</b>	0 to 45°C
<b>DIMENSIONS</b>	123 x 35 x 69 mm
<b>AUTONOMY</b>	5 hours
<b>CHARGE TIME</b>	3 hours
<b>AUTO SHUTDOWN</b>	15 minutes
<b>BATTERY TYPE</b>	Lithium-ion Polymer
<b>VHF UHF BANDWIDTH</b>	100MHz to 1.2 GHz
<b>VHF UHF INPUT MAXIMAL AMPLITUDE</b>	250 mV RMS
<b>HF OUTPUT MAXIMAL AMPLITUDE</b>	100 mV RMS

<b>PXDP-012 BI-PHASE COUPLER</b>	
<b>RF MAX INPUT</b>	4V RMS
<b>RF OPERATING INPUT WITH PXDP-II</b>	1V RMS
<b>MAX AND OPERATING INPUT AT 50-60Hz (SYNCHRONIZATION SIGNAL)</b>	3.5V RMS
<b>INPUT IMPEDANCE</b>	760 ohms
<b>OUTPUT IMPEDANCE</b>	50 ohms
<b>SIGNAL BANDWIDTH</b>	300kHz to 70MHz
<b>OPERATING TEMPERATURE</b>	-20 to 85°C
<b>STORAGE TEMPERATURE</b>	-20 to 85°C
<b>WEIGHT</b>	130g

# Package Content

---

